


- NOTE:
1. V_{CC} SHOULD BE USED TO DRIVE ONLY DEVICES INDICATED.
 2. Y1=4.31616 MHz -NTSC
17.734472 MHz -PAL
 3. ALL RESISTORS ARE 1/4 WATT 5% UNLESS OTHERWISE SPECIFIED.
 4. ALL CAPACITOR VALUES ARE IN μ F UNLESS OTHERWISE SPECIFIED.
 5. CAP. 50PF: ONLY WITH R4 OR R4T2 VERSIONS OF 6567.
 6. SEE ECO NO. 2096 FOR INSTRUCTIONS ON USE OF C106.
 7. CAP. 220PF: ONLY WITH R1 VERSION OF 6569.

COMMODORE 64
SCHALTPLAN
 Diesen Schaltplan bitte in die Lasche auf dem hinteren Buchdeckel einstecken.
Commodore
 © 1982

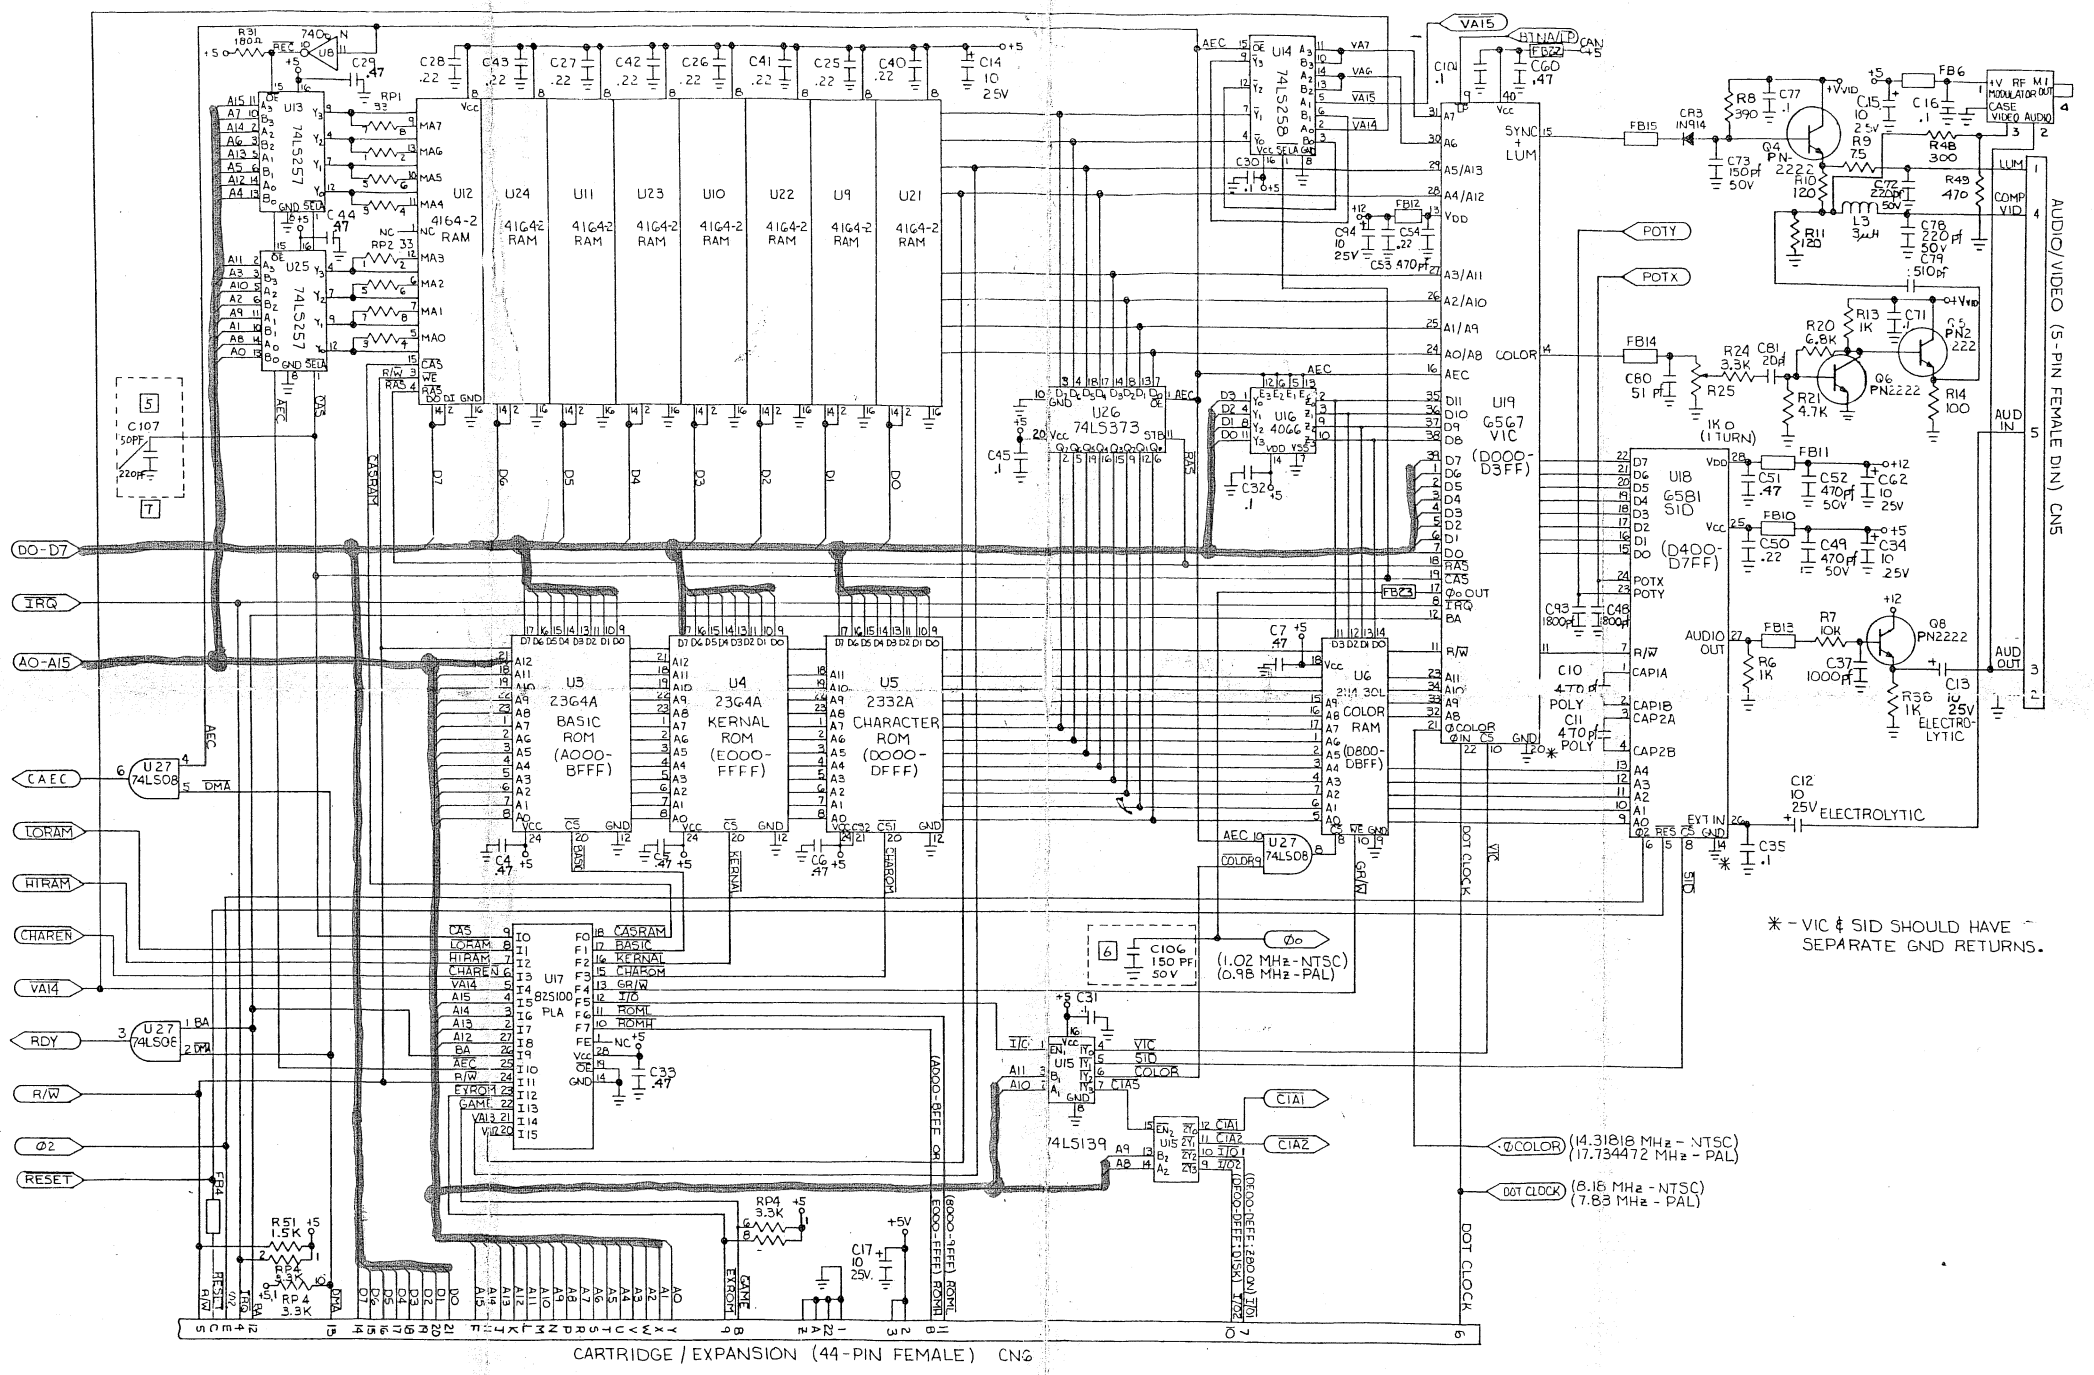

AUDIO/VIDEO (5-PIN FEMALE DIN) CNS

* - VIC & SID SHOULD HAVE SEPARATE GND RETURNS.

CARTRIDGE / EXPANSION (44-PIN FEMALE) CNS

- ① CIA1
- ② CIA2
- ③ DOT CLOCK (8.16 MHz - NTSC)
(7.83 MHz - PAL)
- ④ COLOR (14.31818 MHz - NTSC)
(17.734472 MHz - PAL)